


ROLLER CONVEYOR PM 9700



Product description

The non-driven roller conveyor is suited for horizontal transport of full and empty pallets. At the same time, the rigid frame profile serves as side guide. Floor irregularities can easily be compensated with adjustable supports.

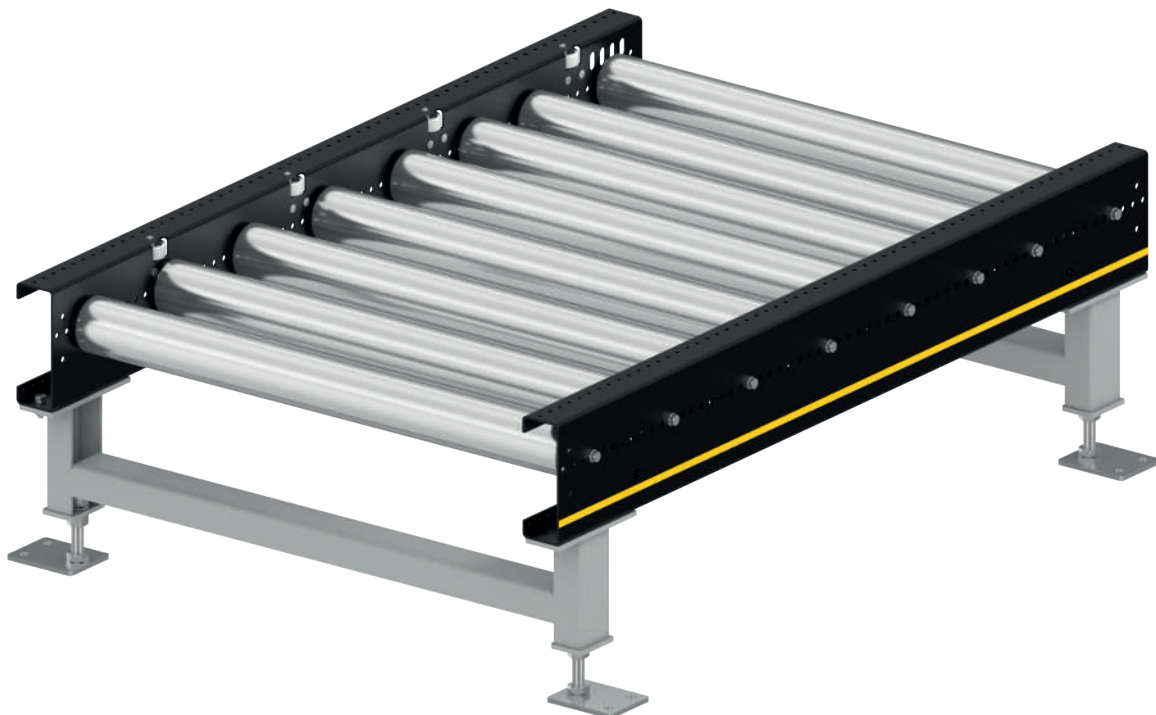


Technical data

General technical data	
Max. load capacity	1500 kg/zone
Ambient temperature	-5 °C to +45 °C (non-condensing) Note: Deep freeze applications are possible only as an option
Rollers	
Roller type	Interroll Series 1450
Roller diameter	89 mm
Wall thickness of rollers	3 mm
Material	Steel, zinc-plated
Profile	
Mounting hole pitch	25 mm
Dimensions	200 x 70 x 4 mm
Color	Powder-coated, all RAL colors are possible
Material	Steel

ROLLER CONVEYOR PM 9700

Dimensions

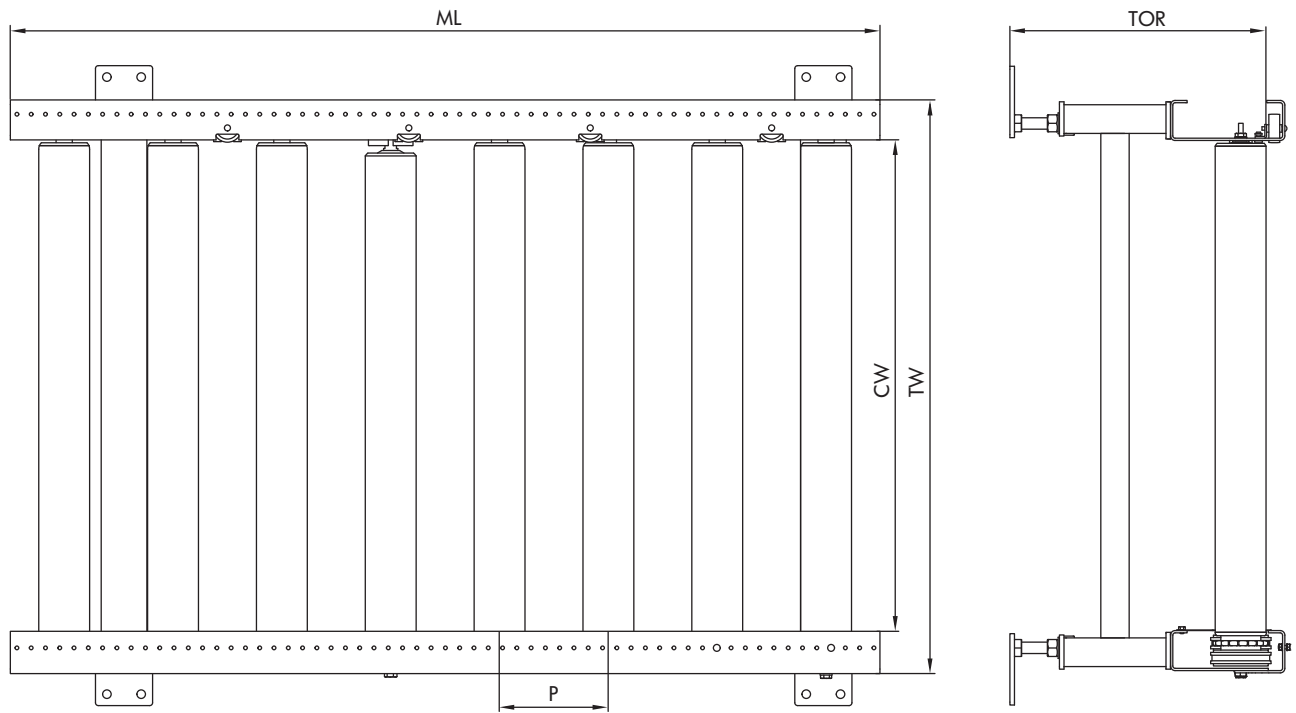

Conveying good width (CGW)	800, 1000, 1200 mm
Module conveying width (CW)	860, 1060, 1295 mm
Module width (TW)	1000, 1200, 1435 mm
Conveying height (TOR)	95, 170 to 1200 mm
Roller pitch (P)	175 to 225 mm
Module length (ML)	300 to 2980 mm