

INFEEED CONVEYOR PM 9740



Product description

The infeed roller conveyor is suited for horizontal infeed and delivery of full and empty pallets. For each storage slot, the infeed roller conveyor can transport a load capacity of 1,200 kg. The infeed or delivery of pallets can be handled by hand pallet trucks or electric pallet trucks.

The drive of the rollers is handled by Interroll's space-saving Pallet Drive. This omits laterally attached motors, individual tracks can be arranged in more space-saving ways, and it increases operational safety.




Technical data

General technical data	
Max. load capacity	1200 kg/zone
Ambient temperature	-5 °C to +45 °C (non-condensing) Note: Deep freeze applications are possible only as an option
Rollers	
Roller type	Interroll Series 1450
Roller diameter	80 mm (min TOR 95 mm)
Wall thickness of rollers	3 mm
Material	Steel, zinc-plated
Profile	
Mounting hole pitch	25 mm
Dimensions	200 x 70 x 4 mm
Color	Powder-coated, all RAL colors are possible
Material	Steel

INFEED CONVEYOR PM 9740

Dimensions

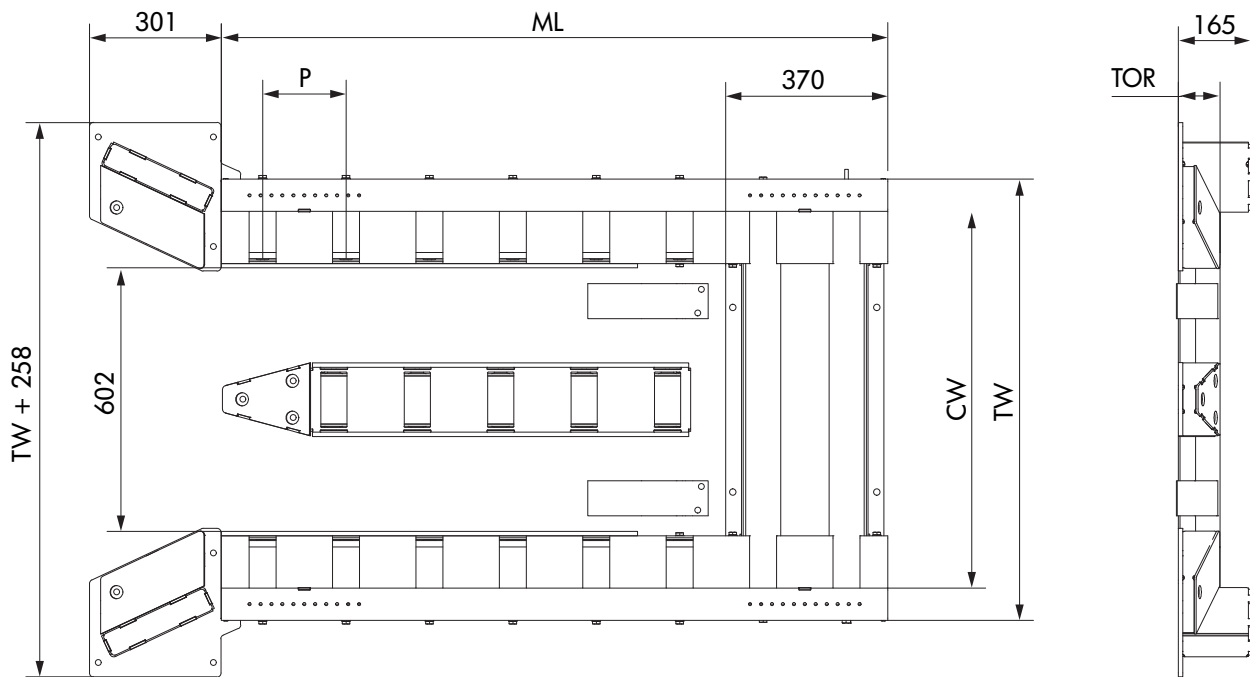

Conveying height (TOR)	95 mm
Module length (ML)	1587, 1460, 1524 mm
Module conveying width (CW)	860, 1060 mm
Module width (TW)	1008, 1208 mm
Roller pitch (P)	127, 158, 190 mm