

ROLLER CONVEYORS

RM 8140

Omni-wheel table

Not powered



24V

48V


400V

Product description

The omni wheel table with multi-directional wheels is particularly well suited for workstation and inspection areas and for materials with soft bottoms that can be moved in all directions with very little force.

Scope of delivery

- The module is fully assembled
- Please order supports and end caps separately

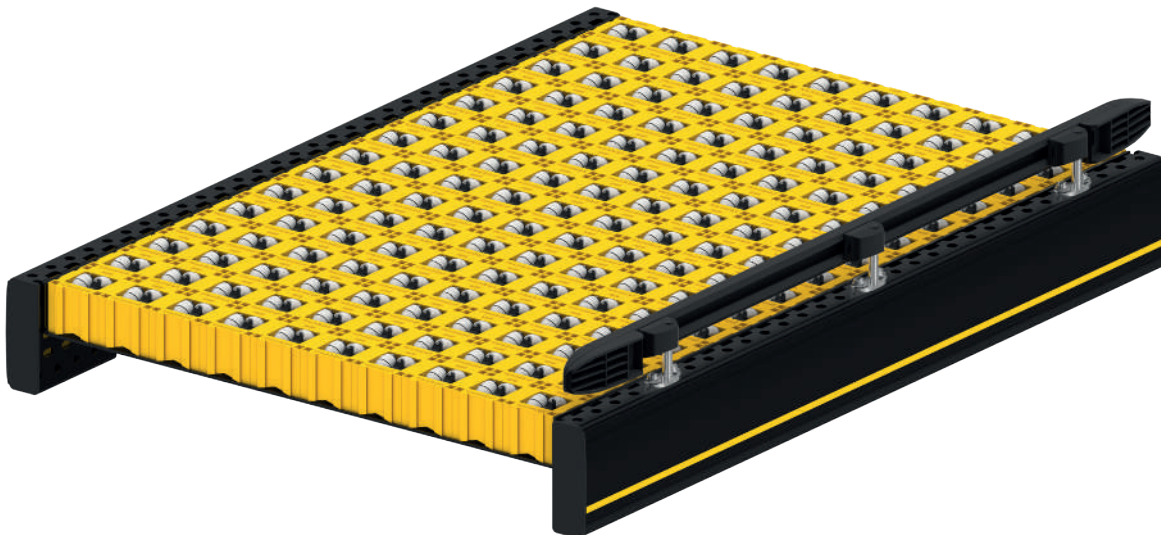


ROLLER CONVEYORS RM 8140

Omni-wheel table
Not powered

Technical data

| General technical data | |
|------------------------|----------------------------------|
| Max. load capacity | 60 kg/m |
| Incline/decline | Not suitable |
| Ambient temperature | -5 to +40 °C |
| Roller | |
| Roller type | Interroll Series 2800 |
| Roller diameter | 48 mm |
| Roller material | Polyamide, polypropylene housing |

Dimensions

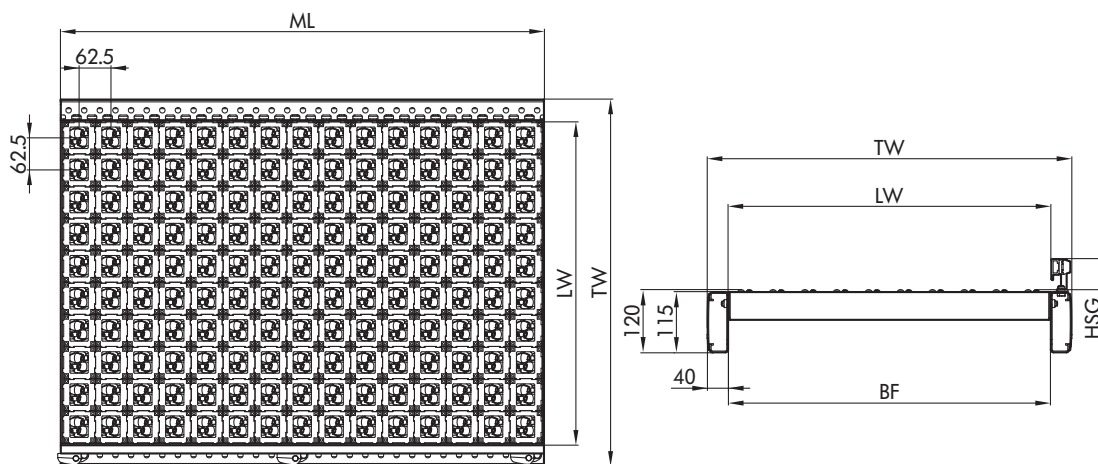

| | | |
|-----|-------------------|--|
| BF | Rated width | 420, 620, 840 mm (others on request) |
| LW | Clear width | BF (+120/-90 mm per side with flexible side guide) |
| ML | Module length | Max. 2160 mm |
| TW | Module width | BF + 80 mm |
| P | Pitch | 62.5 mm |
| HSG | Side guide height | 35 – 65 mm |