

# ROLLER CONVEYORS

## RM 8240

Alignment conveyor  
Powered



24V

48V

400V

### Product description

The alignment conveyor guides products diagonally to the transport direction to a side frame and aligns them to the side guide, if necessary. The side guide must be suitable for this purpose.

### Scope of delivery

- Supply incl. 1 sensor
- Module is completely assembled, except for the flat belt
- Please order supports and end caps separately



# ROLLER CONVEYORS RM 8240


Alignment conveyor  
Powered

## Technical data

General technical data	
Max. load capacity*	50 kg/m
Conveyor speed*	0.1 to 1.4 m/s (at 50 kg)
Incline/decline	Not suitable
Ambient temperature	+5 to +40 °C
Roller	
Roller type	Interroll Series 1700 and Interroll Series 3500
Roller diameter	50 mm
Roller material	Steel, zinc-plated
Drive	
Rated voltage	400 V
Drive medium	Flat belt

\*The combination of maximum values is not always possible.

## Dimensions

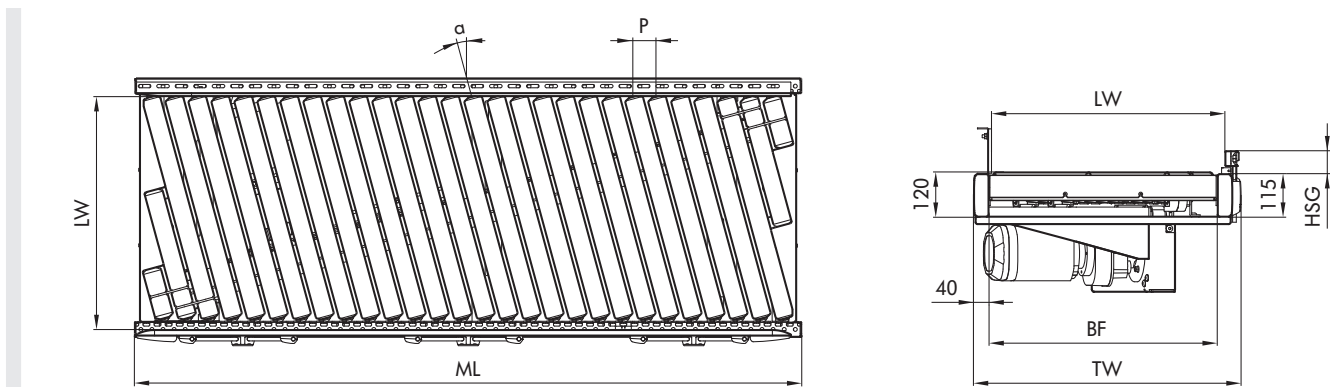

BF	Rated width	420, 620, 840 mm (others on request)
LW	Clear width	BF (+ 120/-90 mm per side with flexible side guide)
ML	Module length	max. 4080 mm
TW	Module width	BF + 80 mm
P	Roller pitch	60 mm
$\alpha$	Angle of rollers	7°/15.2°
HSG	Side guide height	35 – 65 mm
	Side guide height on the alignment side	120 mm as gliding or rolling version